

产品分析证书
Certificate of Analysis

中文名称：毡毛美洲茶素

English Name : Velutin

别名(Alias):

产品编码(Cat. No.):BP3395

CAS Number: 25739-41-7


分子式(M. F.): C₁₇H₁₄O₆

分子量(M. W.): 314.293

批号(Batch No.): PRF8080243

报告日期(Report date): 2017-08-02

检验结果 (Analytical result) :

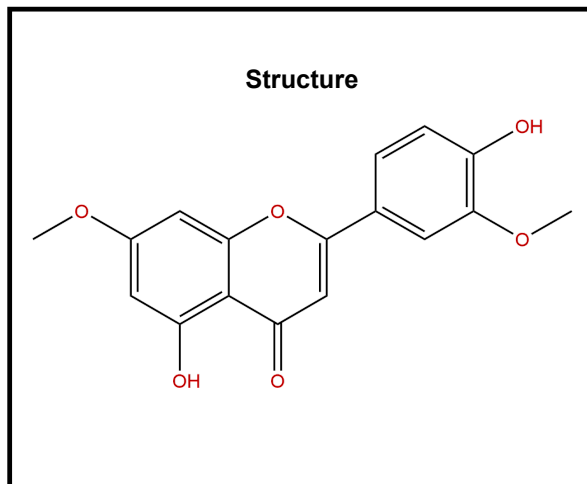

检验项目 (Test Item)	检验指标 (Specifications)	检验结果 (Results)
外观Appearance	Off-white powder	Off-white powder
干燥失重Loss on drying	< 3.0%	1.56%
纯度Purity (HPLC-DAD, 345nm)*	≥96.0%	96.36%
质谱Mass	314.2±1	Conforms
核磁NMR	Comply with the structure	Conforms

* 色谱图见附件 (Please find HPLC chromatography attached.)

检测方法 (Test Method) : Column: Thermo BDS Hypersil C18 , 4.6*100mm , 2.4um; Column temperature: 30°C; Detection

Mode: UV345nm;Flow Rate: 1.0ml/min; Sample dissolution: 10% DMF in methanol; Mobile Phase: A, 0.1% phosphoric acid in water

B, Acetonitrile; Gradient elution: B, 35%-50%,15min.

贮存条件 (Storage) :2~8°C, protected from light, keep package airtight when not in use.

复测期 (Retest date) :two years (2019-08-01) under conditions list above.

QC: Zhang Ling

Date: 2017-08-02

QA: Wu Qi

Date: 2017-08-02

备注(Remarks): The sample solutions should be prepared and used on the same day, it is the best preparing the solutions immediately before use. If the solutions have to be made up in advance, it should be made as aliquots in tightly sealed vials at less than -20°C. Generally, these might be useable for up to two weeks.

In case of quality issue, please contact us within 15 days after receipt of the product.




Tel: +86-28-82633397 Fax: +86-28-82633165

http://www.phytopurify.com Email: sales@biopurify.com biopurify@gmail.com

SAMPLE INFORMATION

Sample Name:	Velutin PRF8080243	Acquired By:	System
Sample Type:	Standard	Sample Set Name:	
Vial:	88	Acq. Method Set:	Velutin
Injection #:	1	Processing Method:	Samples
Injection Volume:	10.00 ul	Channel Name:	345.0nm
Run Time:	25.0 Minutes	Proc. Chnl. Descr.:	PDA 345.0 nm
Date Acquired:	2017-8-2 12:49:26 CST		
Date Processed:	2017-8-2 13:30:28 CST		

Auto-Scaled Chromatogram

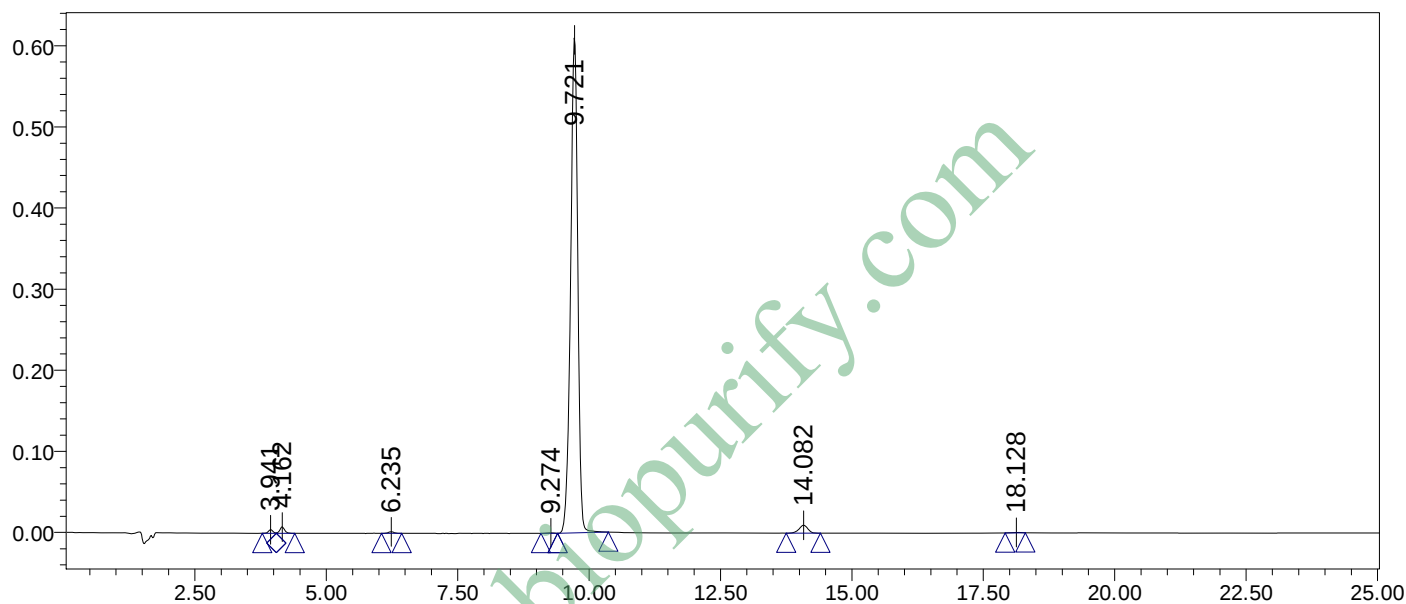

Peak Results

	RT	Area	% Area	USP Plate Count	USP Resolution
1	3.941	26646	0.44	10602.40	
2	4.162	50652	0.84	9911.48	1.33
3	6.235	15784	0.26	15701.89	11.08
4	9.274	5402	0.09	23547.09	13.83
5	9.721	5804468	96.36	24600.81	1.82
6	14.082	114250	1.90	32733.27	15.19
7	18.128	6478	0.11	65598.76	13.37